


# LED No Smoking/ Seat Belt Light



## Advantages:

- Direct Replacement for Teledyne Part #1202-300
- LED Lights are Powered by the 28V
- Up to 100K hour life
- Continued Warping and Discoloration of the Placard is Eliminated
- Cooler Operating Temperature
- Reduced Power Consumption
- Requires no fixture alterations

Aircraft Compatibility:  
Beechcraft 90, 200, 250, 300, 350, 1900

## LED LIGHTING INTERIOR UPGRADE

The PWI LED No Smoking/Seatbelt Light is a direct replacement for existing No Smoking/Seatbelt Light bulb boards.

Beechcraft King Air and 1900 owners now have options when maintaining the Fasten Seatbelt/No Smoking light. This LED upgrade replaces the Teledyne part number 1202-300. By removing the stock light boards with bulbs, the PWI LED upgrade can be used in their place. The PWI LED upgrade uses the factory mounting holes.

It installs into the old board location without major changes to the fixture. There are two LED light boards in each kit – one for each side of the placard. The cost and inconvenience of replacing the entire placard is no longer required.


### Certifications:

- PMA #PQ4159CE



Be BRILLIANT.®

PROPRIETARY INFORMATION  
THE FURNISHING OF THIS DOCUMENT DOES  
NOT CONVEY ANY REPRODUCTION OR MFG.  
RIGHTS.

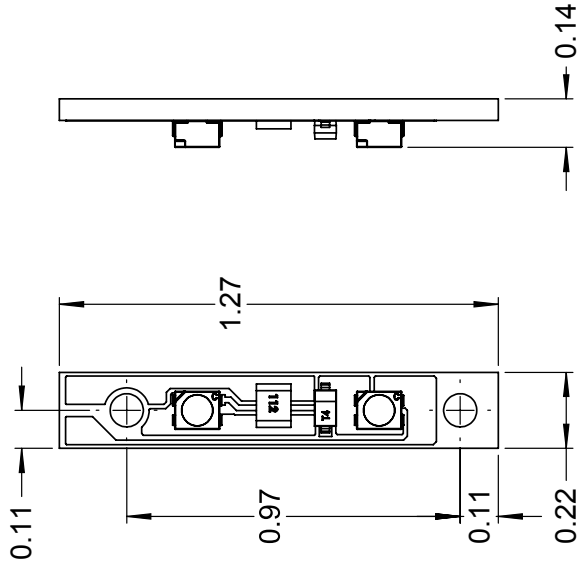

NOTE:  
1. ALL DIMENSIONS ARE IN INCHES.

7310004-000	
Specification	Value
Nominal supply voltage	28VDC
Nominal current draw	20mA
Light operating life	100,000 HR
Luminous Intensity	3100 - 3400 mcd
Color temp	3800 - 4600K
Bulb operating temperature	-30° C ~ +70° C
Wattage	600mW
Weight Per Board assembly	0.2 grams

UNLESS OTHERWISE SPECIFIED  
DIM ARE IN INCHES  
1 PL ± .1° 25°  
2 PL ± .03°  
3 PL ± .010° 4 PL ± .0005°  
INTERPRET DIM AND TOL PER  
ASME Y14.5M-1994

MATERIAL:  
-

ADDITIONAL INFO:  
Beechcraft P/N: 1202-300

SOFTWARE: Solidworks 2016 SP1	R.E.	1/9/17
ISSUED BY	J.E.D.	1/27/17
DRAWN BY	C.W.	3/10/17
MFG CHK BY	ENG	3/10/17
CHECKED BY	R.E.	3/10/17
ENG APR BY		

CAD FILE NAME  
7310004-000\_Sales

**PWI**  
109 S. KNIGHT  
WICHITA, KANSAS 67213  
TEL: 316-942-2811 FAX: 316-942-6209

LED REPLACEMENT LIGHT ASSEMBLY

SIZE	A	CAGE CODE	33497	DRAWING NO.	7310004-000_Sales	REV	IR
SCALE						EST. WGT	SHEET
Copyright © 2020 PWI, Inc. All Rights Reserved						2:1	Weight 1 of 2